

RTM030P

36 Cells
Poly-crystalline

30W
Power output

12.79%
The Highest Efficiency

0~+5W
Tolerance

WWW.RESTARSOLAR.COM

RTM030P is a robust solar module with 36 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee Resun Solar's modules meet the highest quality standards possible.



High module conversion efficiency (up to 12.79%), through superior manufacturing technology



Guaranteed 0~+5W positive power output tolerance ensures high reliability



Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust




Excellent performance under low light environments (mornings, evenings and cloudy days)



Suitable for harsh environments, such as coasts, deserts and lakes. Withstand high level of wind loads (2400pa) and snow loads (5400pa)



0.5% Annual Degradation over 30 years

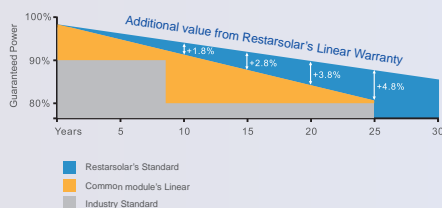


Full range of products and certification systems

ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716



Dimension of PV Modules Unit: mm

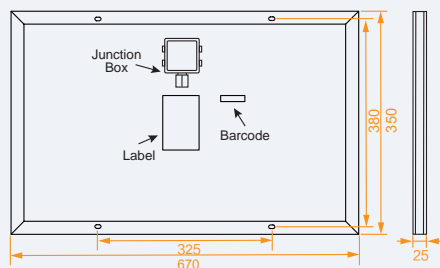

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	30W
Open Circuit Voltage-Voc(V)	21.60V
Short Circuit Current-Isc(A)	1.84A
Maximum Power Voltage-Vmp(V)	18.20V
Maximum Power Current-Imp(A)	1.65A
Module Efficiency (%)	12.79%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax (Wp)	22.40W
Open Circuit Voltage-Voc (V)	20.24V
Short Circuit Current-Isc (A)	1.49A
Maximum Power Voltage-Vmp(V)	16.95V
Maximum Power Current-Imp(A)	1.32A

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Poly-crystalline 156*31.2mm, 5 Bus bars
Cell configuration	36 cells(4x9)
Module dimensions	670x350x25 mm
Weight	2.5KGS
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP65 or IP67, 3 Diodes
Cable	2.5mm2(IEC)/12AWG(UL),800mm
Connectors	MC4 or MC4 Comparable
Standard Packaging	10pcs/carton

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1000V(IEC)/600V(UL)
Max Series Fuse Rating	15A
Limiting Reverse Current	15A

